



FHEM16



Micro Adjustable LED Square-Head Emergency Lights


- Universal J-Box pattern knockout
- Energy saving LED
- Universal mounting plate with quick connect feature
- Fully adjustable glare free lamp head
- NiCd Premium Battery
- Injection-molded, high impact, UV stabilized V-0 thermoplastic construction in white or black finish
- Dual voltage 120V/277V
- UL listed in accordance with UL924
- Two factory installed 1.15W LED Lamp Head

General Specifications


	FHEM16	FHEM16RC	FHEM16SD	FHEM16SDRC
Input Voltage	120/277VAC			
Input Current (120V)	110mA	120mA	35mA	47mA
Input Current (277V)	110mA	120mA	16mA	23mA
Input Power (120V)	0.8W	0.9W	2.5W	3.8W
Input Power (277V)	0.8W	0.9W	2.5W	3.8W
Operating Frequency	60Hz			
Operating Ambient Temperature Range (Ta)	Ambient temperature rating: 20°C to 30°C.			
Lumen Output	161.8 lumens			
Overall Size	12.31" L x 4.5" H			
Emergency Operation	90 minutes			
Compliance	cULus 924 Listed; CEC Title 20			
	Damp Location			
Warranty	5 years from the date of manufacture			

Mechanical Data


NOTE:
1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

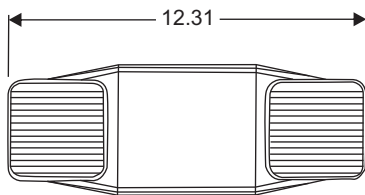

FRONT VIEW

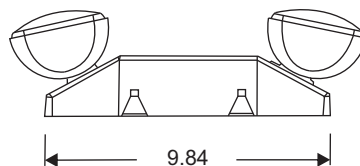

TOP VIEW



SIDE VIEW

Part Number Matrix

FHEM16 **W** **SD**

Case Color
W = White
B = Black

Options
SD = Self Diagnostic
RC = Remote Capable