

# WALL PACK (MWP08)



## DESCRIPTION

Combined with high-efficiency light engine, the classic WP08 LED wall pack family features a high-quality UV-resistant PC lens, which provides excellent lighting. It combines low cost, high performance with controls and emergency options, and the 65W and 100W also feature adjustable color temperatures for increased flexibility in the field and on distributor shelves.



## SPECIFICATION FEATURES

### Construction

- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31.

### Optics

- Single CCT 4000K and 5000K are available for standard version, and the 65W, 100W offer the color tunable version, the CCT can be changed to 3000K/4000K/5000K.
- Scalable Lumen Packages from 3,400 to 15,000 Lumens.
- UV stabilized polycarbonate is available for the optic lens, the professional prismatic design offers a good light distribution control and guarantees the uniformity.

### Electrical

- Universal 120-277 VAC input voltage.
  - 1-10V Dimming.
  - Both drivers have a power factor >90%, THD <20%.
  - Operating Temperature Range: -40°C to 40°C (-40°F - + 104°F).
- Note: Operating with emergency battery temperature range: 10°C to 40°C (+50°F - + 104°F).

### Lifespan

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### Warranty

- Five-year warranty.


### Certifications

- UL cUL wet location listed.
  - DesignLights Consortium™ Qualified.
- Note: DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to [www.designlights.org](http://www.designlights.org) for details.

### Note

- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 C (±5 C ) specifications subject to change without notice.

### PHOTOMETRICS



### ACCESSORIES



#### Photocell

Description: Photocell is field installed or pre-installed in factory by requesting



#### Emergency Battery Backup

Description: It can be pre-installed in factory or field installed

Only suitable for 30W,40W,65W,90W,100W.




#### Power and CCT controller

Description:  
Power adjustment range: 100%-80%-60%-40%,  
CCT adjustment range: 3000K, 4000K, 5000K.  
Only suitable for 65W & 100W.

## DIMENSIONS

unit: mm/inch

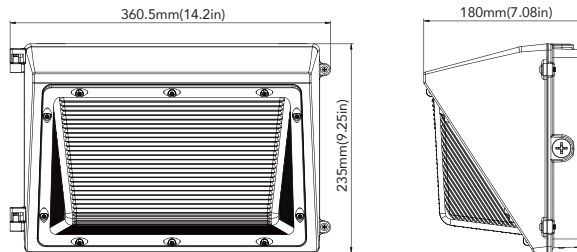

Net Weight  
30W: 6.327lb  
40W: 6.525lb  
65W: 6.724lb  
90W&100W: 7.319lb  
125W: 8.157lb

## PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
30W	120-277VAC	70	3400lm	113 lm/W	3500lm	117 lm/W
40W	120-277VAC	70	5000lm	125 lm/W	5100lm	128 lm/W
65W	120-277VAC	70	7800lm	120 lm/W	7900lm	122 lm/W
90W	120-277VAC	70	10500lm	117 lm/W	10500lm	117 lm/W
125W	120-277VAC	70	15000lm	120 lm/W	15000lm	120 lm/W

## CCT AND POWER ADJUSTABLE

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
65W	120-277VAC	70	7700lm	118 lm/W	8300lm	128 lm/W	7900lm	122 lm/W
100W	120-277VAC	70	11500lm	115 lm/W	12000lm	120 lm/W	11600lm	116 lm/W

## ADJUSTABLE LUMEN OUTPUT TABLE

SETTING	CCT	CRI	SYSTEM WATTS (65W)	LUMENS (65W)	SYSTEM WATTS (100W)	LUMENS (100W)
100%	3000K	70	67.17	7761.40	99.40	11604.80
	4000K	70	63.67	8334.40	94.13	12123.00
	5000K	70	67.30	7950.20	99.88	11702.10
80%	3000K	70	55.34	6695.36	87.62	10620.13
	4000K	70	52.46	7189.66	82.97	11094.36
	5000K	70	55.45	6857.84	88.04	10708.59
60%	3000K	70	40.97	5275.51	62.02	8200.25
	4000K	70	38.84	5664.98	58.73	8566.43
	5000K	70	41.05	5403.75	62.32	8268.70
40%	3000K	70	27.50	3769.14	38.68	5512.80
	4000K	70	26.06	4047.40	36.63	5758.97
	5000K	70	27.55	3860.62	38.87	5558.50

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	430	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11
1	610	40	120	0.33
		40	208	0.19
		40	240	0.17
		40	277	0.14
1	1110	65	120	0.54
		65	208	0.31
		65	240	0.27
		65	277	0.23
1	2270	90	120	0.75
		90	208	0.43
		90	240	0.38
		90	277	0.32
1	2500	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
2	3300	125	120	1.04
		125	208	0.60
		125	240	0.52
		125	277	0.45

## ORDERING GUIDE

Example: MWP08 40W 27V 50K Y Y Y Y Y

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Option)	Emergency Battery (Option)	CCT and Power Adjustable	Internal Code
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>MWP08</b> Wall Pack Series	<b>30</b> 30W <b>40</b> 40W <b>65</b> 65W <b>90</b> 90W <b>100</b> 100W <b>125</b> 125W	<b>27V</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K <b>DDK<sup>1</sup></b> Adjustable Color Temperature	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>P0</b> 120-277V Photocell <b>Blank</b> Without Photocell	<b>B<sup>2</sup></b> Emergency Battery <b>Blank</b> Without Emergency Battery	<b>AD<sup>1</sup></b> With Adjustment Dial <b>Blank</b> Without Adjustment Dial	<b>Blank</b> <b>Alphanumeric</b>

Note: 1. Only the 65W & 100W optional for DDK and AD.  
2. Only 125W not suitable for emergency battery.